














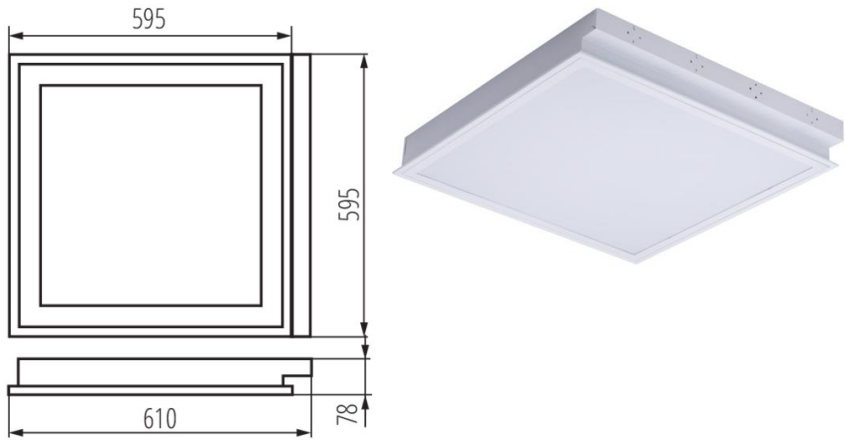



PRODUCT SPECIFICATION SHEET

Wall and Ceiling

 <div data-bbox="77 846 863 1035"> <div>  220-240 AC </div> <div>  50/60 </div> <div>  T8 </div> <div>  </div> <div>  </div> <div>  </div> <div>  5÷25 </div> <div>  </div> <div>  </div> <div>  1÷2,5 </div> <div>  EVG BALLAST </div> <div>  0,5m </div> <div>  CE </div> <div>  EAC </div> </div>	<div data-bbox="987 380 1247 443"> ITEM CODE: 1001022 REGIS 3 OPAL 418 PT </div> <div data-bbox="987 449 1156 480"> DESCRIPTION </div> <div data-bbox="987 487 1586 617"> <p>REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.</p> </div> <div data-bbox="1170 653 1453 1073">  <p>874/2012 </p> </div>
--	---

PRODUCT DETAILS

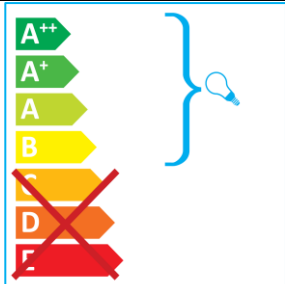Material	Aluminium alloy, PMMA, steel
Height	78 mm
Width	595 mm
Length	610 mm
Weight	2910 g
Color	White
Replaceable light source	Yes

TECHNICAL DATA

Frequency	50/60 Hz
Maximum Power	4 x 18 W
Cap	G13
Voltage	200-240 V
IP	IP20
Light Source	T8
Connection type	Self-clamping block
Minimum distance from the illuminated object	0,5m